

### DESCRIPTION

- Metal construction with a chrome and spot resistant stainless finish
- 600mm Flexible supplies with G 1/2 inlet connections
- Includes plastic pop-up waste assembly

### OPERATION

- Lever style handle
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel

### FLOW

- Flowrate is about 6.9L/min at 0.3Mpa with aerator
- Flowrate is about 4.0L/min at 0.1Mpa with aerator

### CARTRIDGE


- MOEN Duralast cartridge

### STANDARD

- Designed to meet GB 18145

### WARRANTY

- 5years limited warranty against leaks and drips

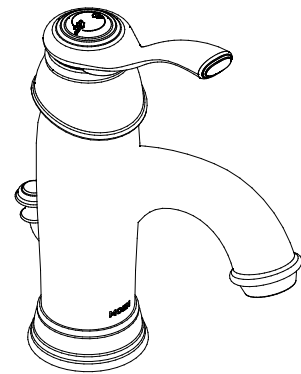


Montbard

Single Mount Single-Handle Lavatory Faucet

Models: GN61121/GN61121SRN

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX. DIA. HOLE

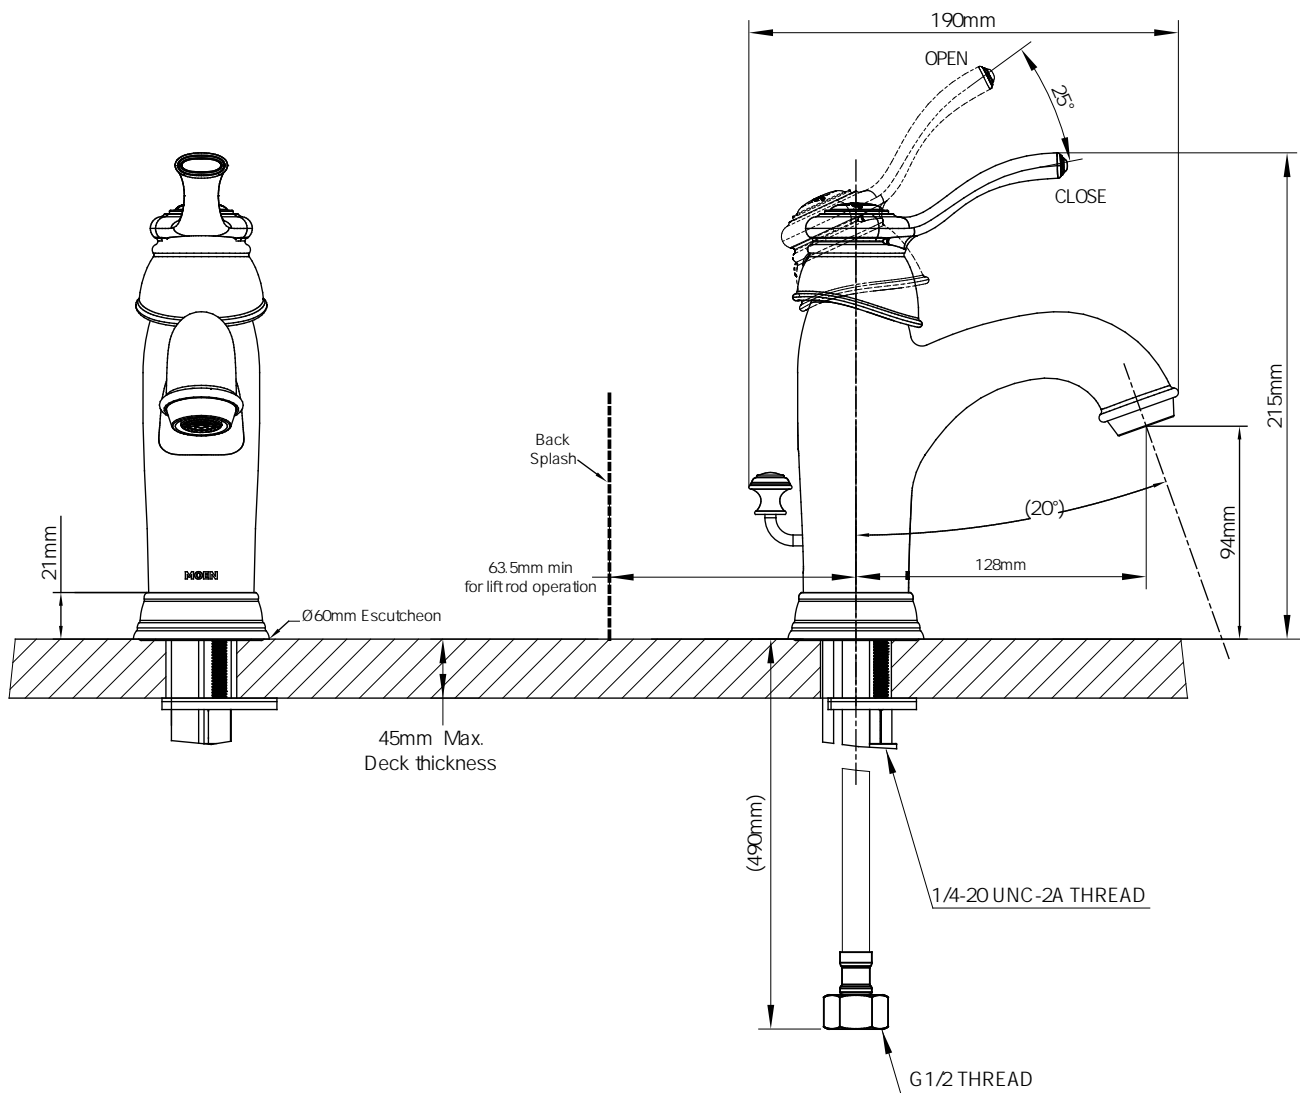

CRITICAL DIMENSION

(DO NOT SCALE)