

DESCRIPTION

- Metal construction with a chrome finish
- G 1/2 inlet connections
- Includes Three 600mm long flexible inlet hoses

OPERATION

- Lever style Mix handle / Round Filter Handle With Knob
- Pull-on / Push-off
- Temperature controlled through 100 degree arc of handle travel
- Filter handle turn anticlockwise to open

FLOW

- Mix water flowrate is about 3.6L/min at 0.1Mpa with aerator.
- Mix water flowrate is about 6.5L/min at 0.3Mpa with aerator.
- Filter water flowrate is about 2.5L/min at 0.1Mpa.

CARTRIDGE


- MOEN Duralast 146565 cartridge design.
- Nonmetallic / nonferrous and ceramic material

STANDARD

- Designed to meet GB 18145

WARRANTY

- 5years limited warranty against leaks and drips



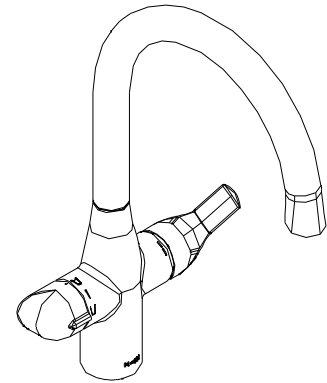


ARBOR

Single Mount Two-Handle Two-Way Kitchen Faucet

Models: GN89112

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 34mm MIN. TO 38mm MAX. DIA. HOLE

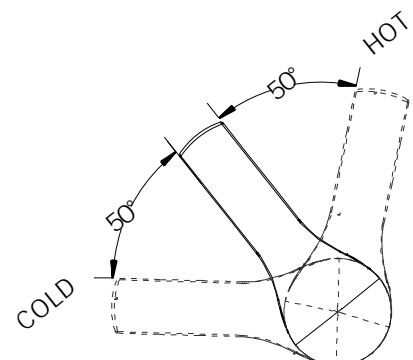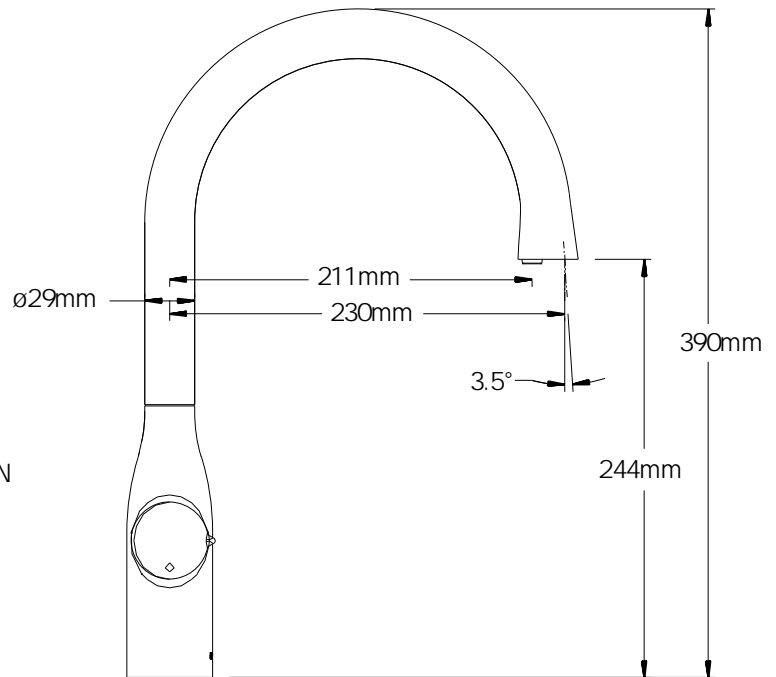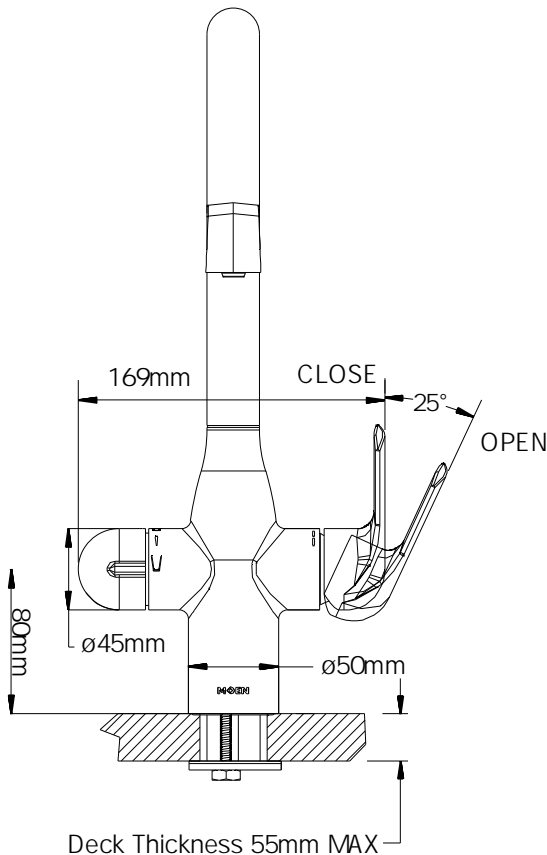

CRITICAL DIMENSION
(DO NOT SCALE)